

TAXI Topper LED Sign – MT Series

Outdoor mobile media advertising Solution

Mobile LED Display, the revolutionary solution to the OOH advertising, Your ads can quickly be pushed through to the crowds in everywhere, It has anti-shock, anti-crash design and make it easy to install.



TAXI Topper LED Sign – MT Series

Feature:



Certificates:



Feature:

Light weight design:

With total weight about 18kg per unit, durable enough for outdoor use,

Low power consumption:

Total max power consumption about 380W/unit; saving energy investment;

Clean cable inside:

With PCB conduct the single and power, inside cabinet no visible cables:

Easy maintenance:

With module front access, it's easy to install the sign and no need to open the cabinet to provide the service;

Low heat:

With customized design power supply install at the bottom of the sign, the temperature of the sign keep around 30 degree normally.

Multi-control method:

With 3G, wifi or group control of the signs, GPS locking the place to place for certain advertising.



Color can be customized



optional install kit




PRODUCT SPECIFICATION

Modules

Main technical Parameters

Outline Dimension Drawing

Item	Mobile	
Model	MT-3.91S	MT- 5S
Pixel Pitch (mm)	3.91	5
Pixel Density (dot/m ²)	65,410	40,000
LED Type	SMD2525	SMD2525
Module Size (W x H)mm	250 x 250	320 x 320
Module Resolution (W x H)	64 x 64	64 x 64
Module Weight (Kg)	0.52	0.28
Power Consumption per Module (W)	40	48
Driver Mode (Scan)	1/16	1/8
Brightness (cd/m ²)	≥5,000	≥5,000
Grey Scale (bits)	14	14
Refresh Rate (Hz)	≥960	≥960
Unit Size (W x H x D)mm	771 x 371 x 200	981 x 441 x 200
Display Size (W x H)	750 x 250	960 x 320
Display Resolution (W x H)	192 x 64	192 x 64
Unit Weight (Kg/PC)	16	18
Max Power Consumption (W/m ²)	≤320	≤380
Average Power consumption (W/m ²)	145	171
Viewing Angle	Degree: H 120° Degree: V 120°	
Mini View Distance (m)	4	5
Use Temperature(°C)	Operating -10°C~40°C/14°F~104°F Storage -20°C~50°C/-4°F~122 °F	
Input Voltage	DC 12V	
Input Power Frequency (Hz)	-----	
Failure Rate	<1/100,000	
Control Type	USB \ Network \ 3G & 4G optional	
Life Time (hrs)	100,000	
IP Level	IP 65	

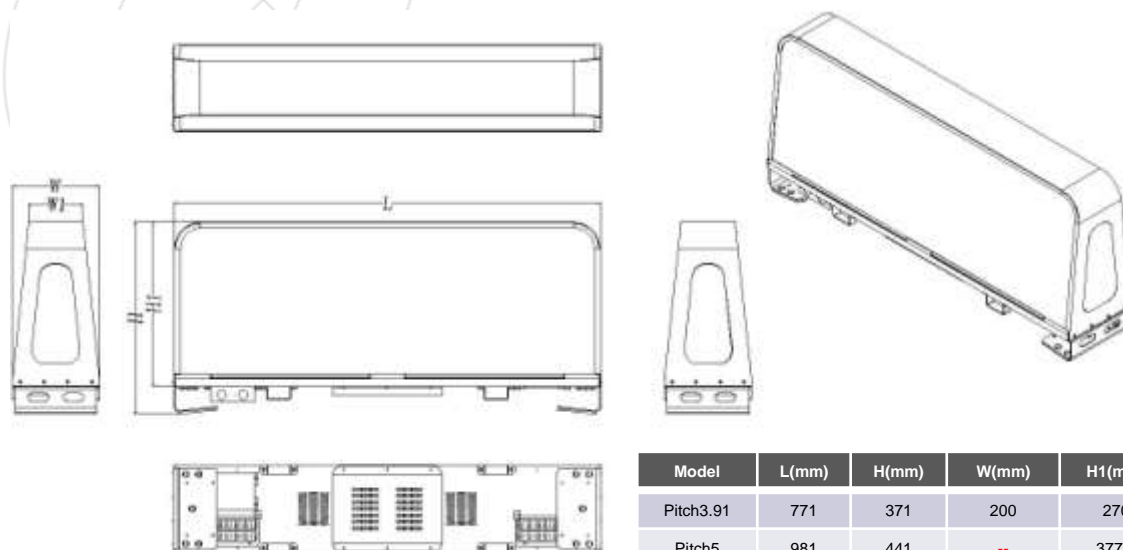

Model	L(mm)	H(mm)	W(mm)	H1(mm)	W1(mm)
Pitch3.91	771	371	200	270	141
Pitch5	981	441	--	377.5	125

Remark: Specifications are subject to change without notice.



105-6091 Dyke Rd., Richmond BC V7E 3R3
Canada



Tel: (604) 285-5010



Fax: (604) 447-8647



E-mail: sales@leaderled.ca



Web: www.leaderled.ca



International hotline:

86-755-2359 0202