


The revolutionary design makes it an ideal solution for the outdoor school message centers



Full Front Service



P-COLOR Full Front Service - FAM Series

**Feature:**



**Certificates:**



Rear View



T-wrench



No Screw Needed

**Feature:**

High Brightness

High Contrast


High Refresh Rate

High Resolution

PCB design, save more than 30% power consumption

Dimmable through light sensor or time-table schedules

Support different installation conditions, support master-slave double sided applications

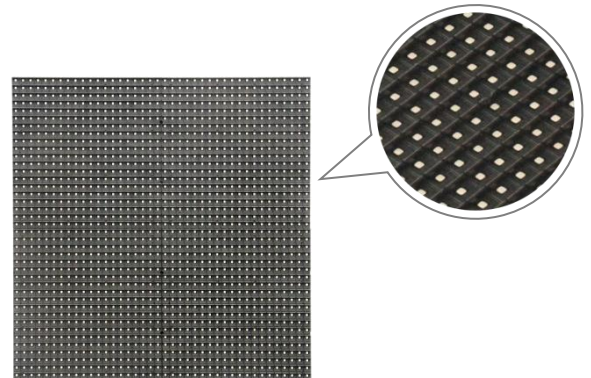

Front View



## PRODUCT SPECIFICATION

Item	LED message center		
	XS-A, B	S-A, B	M-A, B
Model	XS-A, B	S-A, B	M-A, B
Pixel Pitch (mm)	10	10	10
Pixel Density (dot/m <sup>2</sup> )	10,000	10,000	10,000
LED Type	SMD3535	SMD3535	SMD3535
Module Size (W x H x D)mm	320 x 320 x 27	320 x 320 x 27	320 x 320 x 27
Module Resolution (W x H)	32 x 32	32 x 32	32 x 32
Module Weight (Kg)	1.9	1.9	1.9
Power Consumption per Module (W)	70	70	70
Driver Mode (Scan)	1/4	1/4	1/4
Brightness (cd/m <sup>2</sup> )	≥6,000	≥6,000	≥6,000
Grey Scale (bits)	14	14	14
Refresh Rate (Hz)	≥1920	≥1920	≥1920
Cabinet Size (W x H x D)mm	960x320x128	1280x 320 x 128	1280x 640 x 128
Cabinet Resolution (W x H)	96 x 32	128 x 32	128 x 64
Cabinet Weight (Kg)	22	29	58
Max Power Consumption (W)	≤170	≤220	≤440
Average Power consumption (W)	50	80	160
Viewing Angle	Degree: H	120°	120°
	Degree: V	120°	120°
Mini View Distance (m)	10	10	10
Use Temperature(°C)	Operating	-20°C~40°C/-4°F~104°F	
	Storage	-25°C~50°C/-13°F~122 °F	
Input Voltage	100~240V		
Input Power Frequency (Hz)	50Hz-60Hz		
Failure Rate	<1/100,000		
Signal Input Format	SDI, RGBHV, YUV,YC, Composite, HDMI,DVI, SD/HD-SDI etc.		
Life Time (hrs)	100,000		
IP Level (Front / Rear)	IP65 / IP54		

All product specifications are subject to change without prior notice; please contact sales for details.



2129-11871 Horseshoe Way, Richmond BC V7A 5H5



Tel: (604) 285-5010



Fax: (604) 447-8647



E-mail: sales@leaderled.ca



Web: www.leaderled.ca



Customer service hotline:

**(604) 285-5010**