


Perfect solution for retail stores, hotels, bars and restaurants, etc.
Cloud based operation, easy to install.

Poster – MI/LI Series



Module:

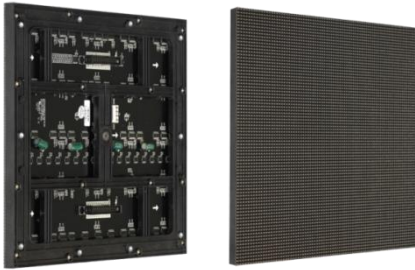

Feature:



Certificates:



Feature: >>>

1. Plug and Play
2. Support local and Cloud (Internet) based control
3. Ethernet, USB, 3G , 4G & Wi-Fi optional
4. Energy Saving
5. AC to DC power supply, safe working voltage
6. NO additional structure needed for installation



PRODUCT SPECIFICATION

Item dimension	1040 x 560 x 70		1520 x 1040 x 70	
Model	MI-P4	MI-P5	LI-P4	LI-P5
Pixel Pitch (mm)	4	5	4	5
Pixel Density (dot/m ²)	62500	40,000	62500	40,000
LED Type	SMD2121	SMD3528	SMD2121	SMD3528
Module Size (W x H x D)mm	240 x 240 x 15	240 x 240 x 15	240 x 240 x 15	240 x 240 x 15
Module Resolution (W x H)	60 x 60	48 x 48	60 x 60	48 x 48
Module Weight (Kg)	0.72	0.51	0.72	0.51
Power Consumption per Module (W)	37	20	37	20
Driver Mode (Scan)	1/15	1/12	1/15	1/12
Brightness (cd/m ²)	≥1500	≥1,700	≥1500	≥1,700
Grey Scale (bits)	16			
Refresh Rate (Hz)	≥960			
Unit Size (W x H x D)mm	1040 x 560x70	1040 x 560 x70	1520 x 1040x70	1520 x 1040 x70
Display Size (W x H)mm	960 x 480	960x480	1440 x 960	1440x960
Display Resolution (W x H)	240 x 120	192x96	360 x 240	288x 192
Unit Weight (Kg/pc)	16	16	37	37
Max Power Consumption (W/m ²)	≤650	≤333	≤650	≤333
Average Power consumption (W/m ²)	230	117	230	117
Viewing Angle	Degree: H		120°	
	Degree: V		120°	
Mini View Distance (m)	4	5	4	5
Use Temperature(°C)	Operating		-10°C~40°C/14°F~104°F	
	Storage		-20°C~50°C/-4°F~122 °F	
Input Voltage	100~240V			
Input Power Frequency (Hz)	50Hz-60Hz			
Failure Rate	<1/100,000			
Control Type	Ethernet, USB, 3G , 4G & Wifi optional			
Life Span (hrs)	100,000			
IP Level (Front / Rear)	IP20 / IP20			

Main technical Parameters

Poster – M/LI Series

Remark: Specifications are subject to change without notice.



105-6091 Dyke Rd., Richmond, BC V7E 3R3
Canada



Tel: (604) 285-5010
Fax: (604) 447-8647



E-mail: sales@leaderled.ca
Web: www.leaderled.ca



International hotline:

86-755-2359 0202